


## Spray System for Gear Applications

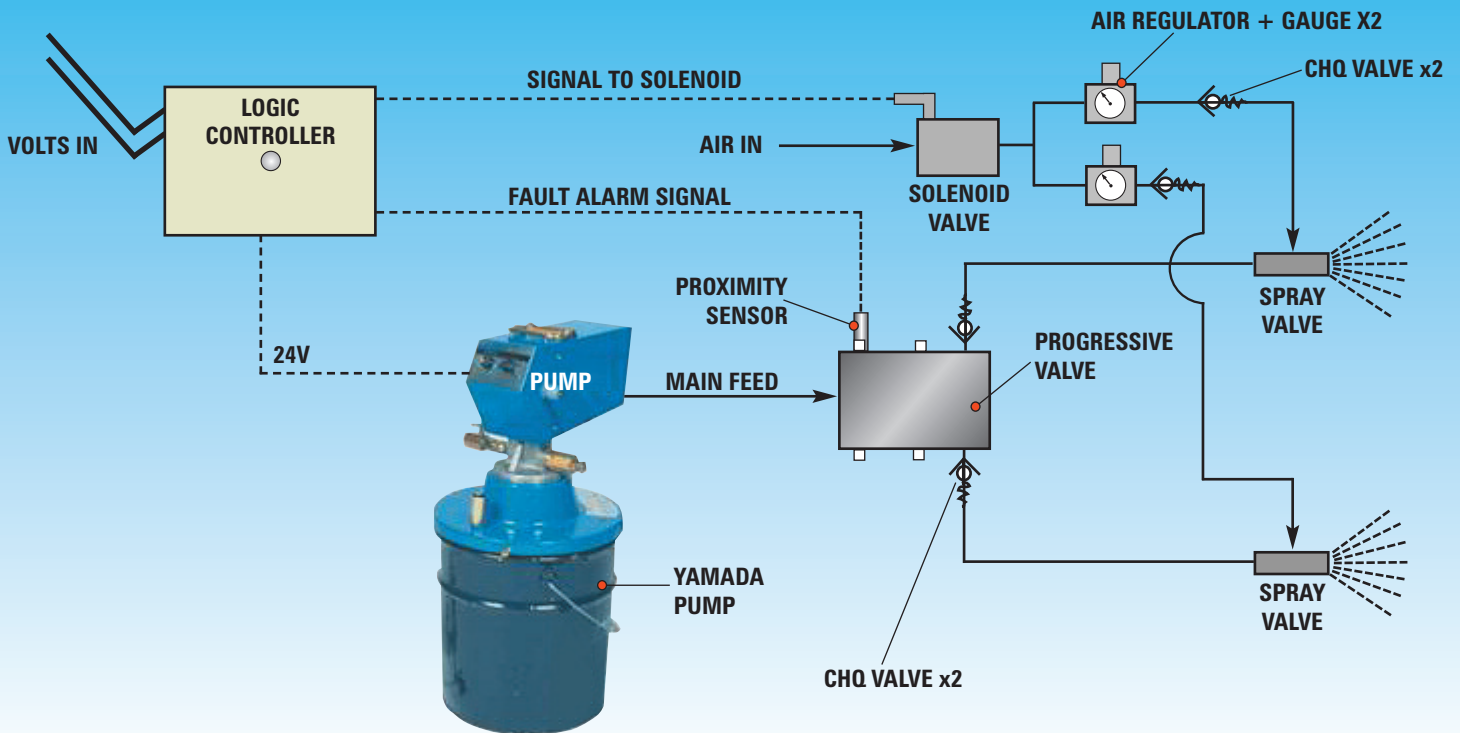

### Operation

- 1). Pump receives signal from logic controller.
- 2). Logic controller operates solenoid and few seconds later operates pump for specified 'on' time.
- 3). Pump delivers grease to divider block (with proximity flow sensor if required)
- 4). with air & grease supplied to spray valve, the mixture is applied to the gear as long as pump is running
- 5). Air remains on for a few seconds after pump stops to clear grease from spray valves

#### UK Headquarters:

#### Interlube Systems Ltd

St Modwen Road, Parkway Industrial Estate  
Plymouth, Devon, England PL6 8LH

Tel: +44 (0)1752 676000 Fax: +44 (0)1752 676001

e-mail: [Info@interlubesystems.com](mailto:Info@interlubesystems.com) Web Site: [www.interlubesystems.com](http://www.interlubesystems.com)

#### USA Headquarters:

#### Interlube Systems Inc

4696 Wadsworth Road  
Dayton

Ohio, 45414, USA